


# eco



- ARTICLE NO : ECO WC03S  
 DESCRIPTION : WC Sensor Flush Valve  
 POWER SUPPLY : 100 ~ 240 VAC 50/60 Hz to 6 VDC  
 FINISH : Stainless Steel 316 Hairline Finish  
 ACTUATOR SIZE : 170 x 170 mm  
 BOX SIZE : 310 x 275 x 117.5 mm  
 FEATURES :
- Auto Dual Flush
  - Push Button Manual Override (Full Flush)
  - Touchless Proximity Sensing Override (Reduced Flush)

## TECHNICAL SPECIFICATION

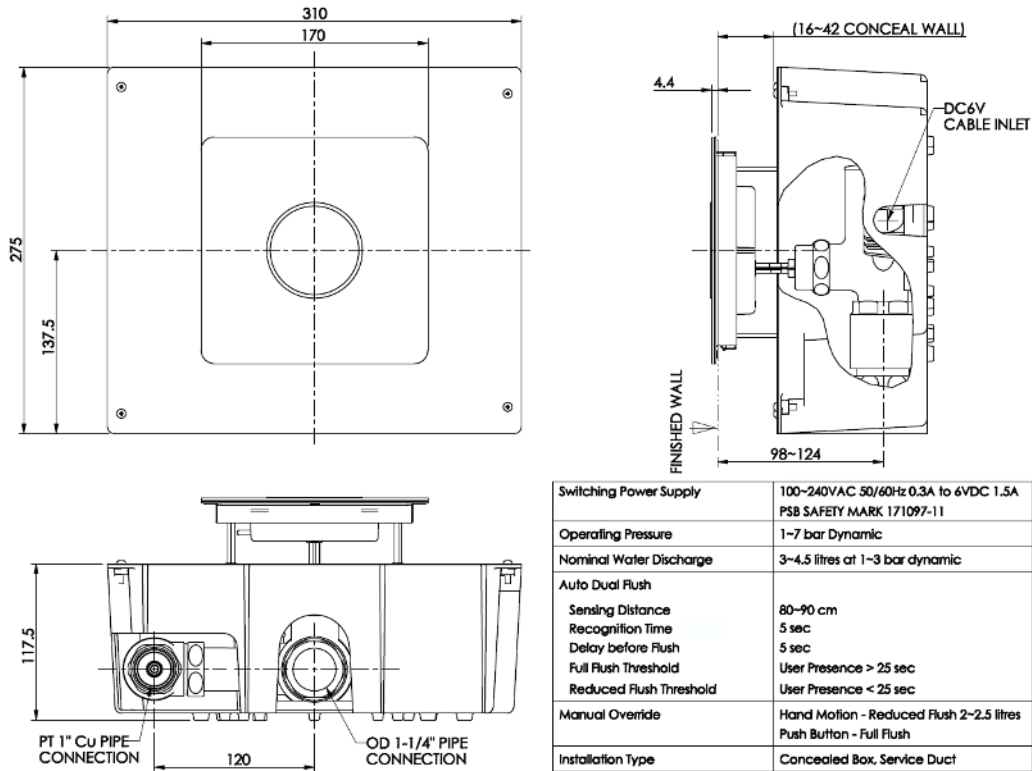

All dimensions in mm

Switching Power Supply	100-240VAC 50/60Hz 0.3A to 6VDC 1.5A PSB SAFETY MARK 171097-11
Operating Pressure	1~7 bar Dynamic
Nominal Water Discharge	3~4.5 litres at 1~3 bar dynamic
Auto Dual Flush	
Sensing Distance	80~90 cm
Recognition Time	5 sec
Delay before Flush	5 sec
Full Flush Threshold	User Presence > 25 sec
Reduced Flush Threshold	User Presence < 25 sec
Manual Override	Hand Motion - Reduced Flush 2~2.5 litres Push Button - Full Flush
Installation Type	Concealed Box, Service Duct
Wall Opening	150 mm X 150 mm
TÜV SÜD PSB Test Report	7191002687-MEC11/02-LNB

Copyright © W. ATELIER PTE. LTD., All rights reserved.

All photos and specification in this brochure are only for illustration and do not necessarily represent the final standard specification. Manufacturer reserve the rights to make further improvements and changes, where appropriate during design development. Therefore, they shall not form part of an offer or contract.